

# Data Sheet

## SHF PDV110 A



## 110 GHz Power Divider


## Description

The SHF PDV110 A is a compact, high-performance resistive power divider with a bandwidth exceeding 110 GHz. Output ports (2 and 3) are amplitude and phase-matched.

Fully customizable 1.0 mm connector configurations as well as between series (1.0 mm ↔ 1.85 mm) configurations are available to meet individual requirements of the customer and to avoid additional adapters in the setup.

Dedicated mounting holes on the back side allow secure installation on a mounting plate for stable system integration.

The SHF PDV110 A can also be used as a power combiner, using port 2 and 3 as input ports.

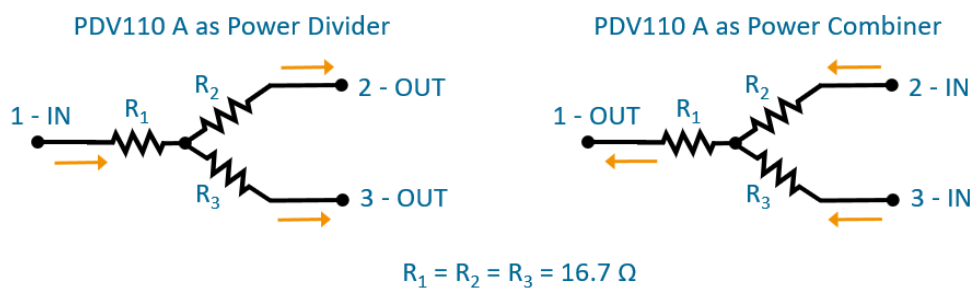

*Circuit schematic of the PDV110 A.*

## Features

- Small and lightweight
- Low loss and low reflection
- Excellent phase and amplitude matching at output ports
- Bi-directional (can be used as divider or combiner)

## Configurations

- WFWFWF: All ports 1.0 mm female
- Other configurations on request



## Product Code Example

- SHF PDV110 A | WFWFWF
- Brand: SHF  
Type: 110 GHz Power Divider  
Revision: A  
Connector Configuration:  
Port 3 - 1.0 mm female  
Port 2 - 1.0 mm female  
Port 1 - 1.0 mm female

## Specifications<sup>1</sup>

### Absolute Maximum Ratings

Parameter	Unit	Symbol	Min	Typ	Max	Conditions
Power handling	W	$P_{in, max}$			1	$P_{in, max}$ represents the overall maximum power that can flow through the PDV110 A. When used as a combiner, each input should not be fed more than $P_{in, max}/2 = 0.5$ W.

### Mechanical Characteristics

Parameter	Unit	Symbol	Min	Typ	Max	Conditions
Operating temperature	°C	$T_{case}$	10		50	
Connectors						1 mm
Dimensions	mm				42.2 30.1 9	Width Length Height
Weight	g			15.3		

<sup>1</sup> These specifications are valid for the WFWFWF configuration.



**Electrical Characteristics (At 25°C case temperature, unless otherwise specified)**







Parameter	Unit	Symbol	Min	Typ	Max	Conditions
Maximum Operating Frequency	GHz	$f_{max}$	110			
Minimum Operating Frequency		$f_{min}$			DC	
Input impedance	$\Omega$	$R_L$		50		
Insertion loss	dB	IL			7 7.8 8.5 9	$f < 15$ GHz $15$ GHz $< f < 40$ GHz $40$ GHz $< f < 70$ GHz $70$ GHz $< f < 110$ GHz
Return loss	dB	RL	20 12 12 9			$f < 15$ GHz $15$ GHz $< f < 40$ GHz $40$ GHz $< f < 70$ GHz $70$ GHz $< f < 110$ GHz
Power handling	W	$P_{in,max}$			1	
Amplitude Balance	dB				$\pm 0.5$ $\pm 0.8$ $\pm 1.2$	Amplitude balance <sup>2</sup> between output ports. $f < 30$ GHz $30$ GHz $< f < 70$ GHz $70$ GHz $< f < 110$ GHz
Phase Balance	deg				$\pm 5$ $\pm 10$ $\pm 15$	Phase balance <sup>3</sup> between output ports. $f < 30$ GHz $30$ GHz $< f < 70$ GHz $70$ GHz $< f < 110$ GHz

<sup>2</sup> The amplitude balance is defined as the amplitude difference in dB of the output signals at port 2 and 3. It is calculated as:  $|S_{31}|_{dB} - |S_{21}|_{dB}$ .



<sup>3</sup> The phase balance is defined as the phase difference in degrees of the output signals at port 2 and 3. It is calculated as:  $\varphi_{31} - \varphi_{21}$ , where  $\varphi_{31}$  and  $\varphi_{21}$  indicate the unwrapped phase of  $S_{31}$  and  $S_{21}$ , respectively.



## Typical S-Parameters and Balance Properties<sup>4</sup>

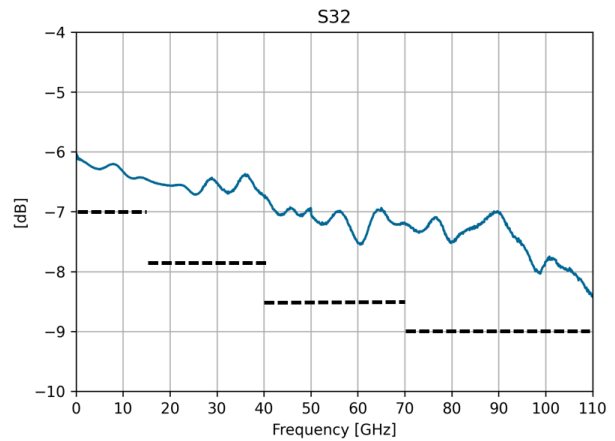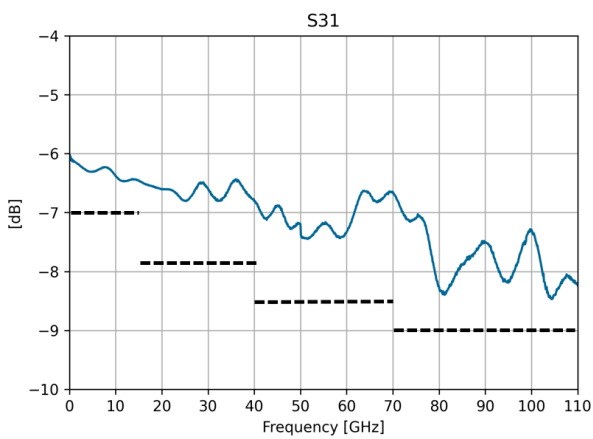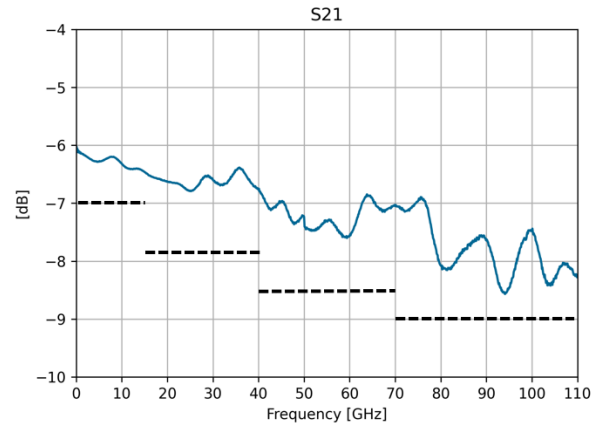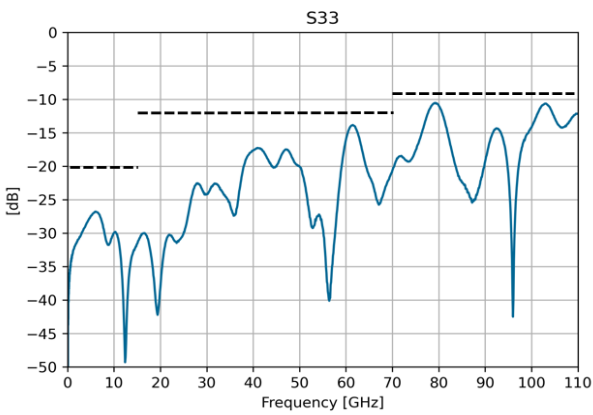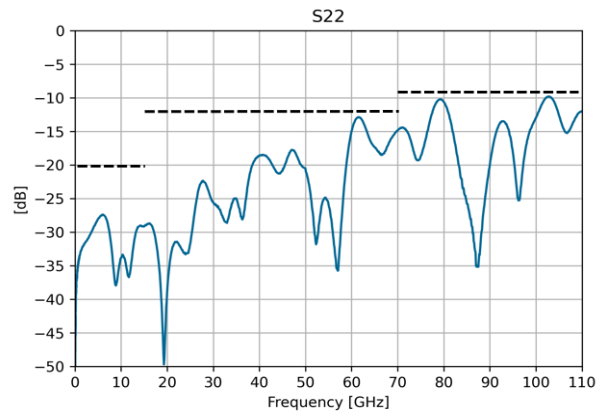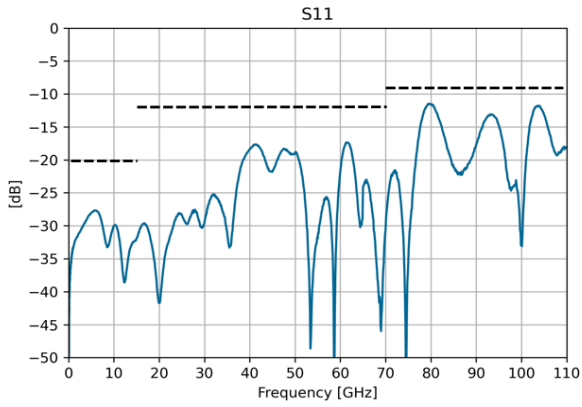


<sup>4</sup> These typical plots are valid for the WFWFWF configuration.

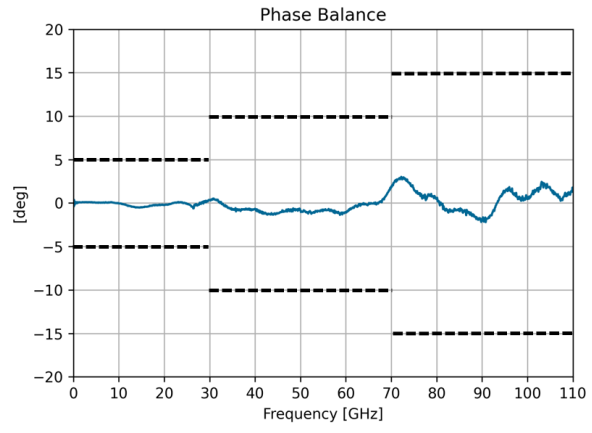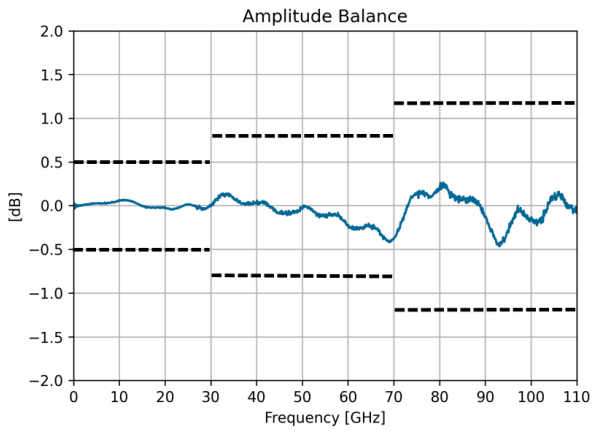

- **Blue solid lines: Measurements**
- **Black dashed lines: Specifications**

## Mechanical Drawing

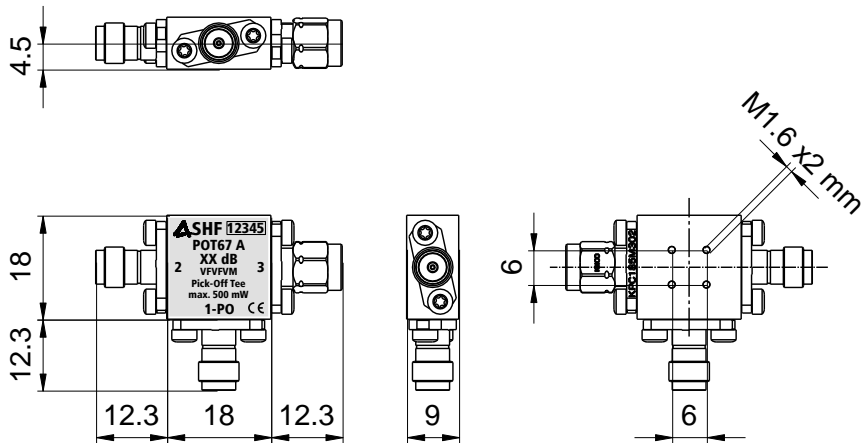

All dimensions in mm



**SHF Communication Technologies AG**

Wilhelm-von-Siemens-Str. 23 D | 12277 Berlin | Germany

+49 30 772 051 0

[sales@shf-communication.com](mailto:sales@shf-communication.com)

[www.shf-communication.com](http://www.shf-communication.com)