

DC - 20 GHz Panel Adapter, In-Series SMA Coaxial Panel Adapters

DESCRIPTION

"SMA-FFPA" coaxial panel adapter is 9.5 mm "D"-holed panel mountable. It is designed for telecommunication systems and test equipment.

Connector Interface Standard:

- MIL-C-39012
- MIL-STD-348A
- IEC Std-169-15

SPECIFICATIONS

Electrical:


Frequency Range	DC - 20 GHz (*)
SWR	< 1.2
Insertion Loss	< 0.1 dB
Input Power	10 W (max)
Temperature Range	-55 to +85 °C

Mechanical:


Outer Conductor	Passivated Stainless Steel (**)
Inner Conductor	Gold Plated Beryllium Copper
Coupling Torque	56 N-cm (Nominal)
Connect/Disconnect Life	> 5,000 Cycles (***)




TYPE: SMA-FFPA Female/Female Outline

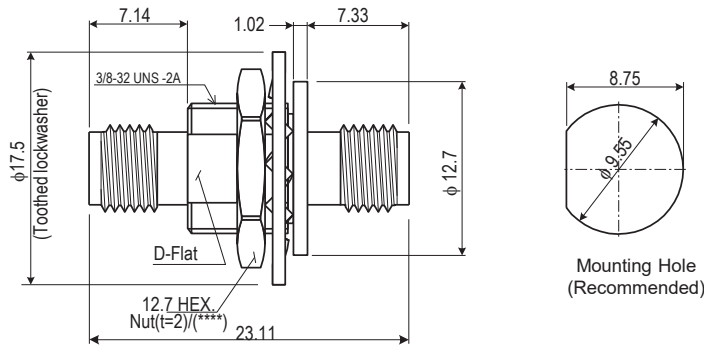

RF Performance ("Non-Insertable Device" Calibration)

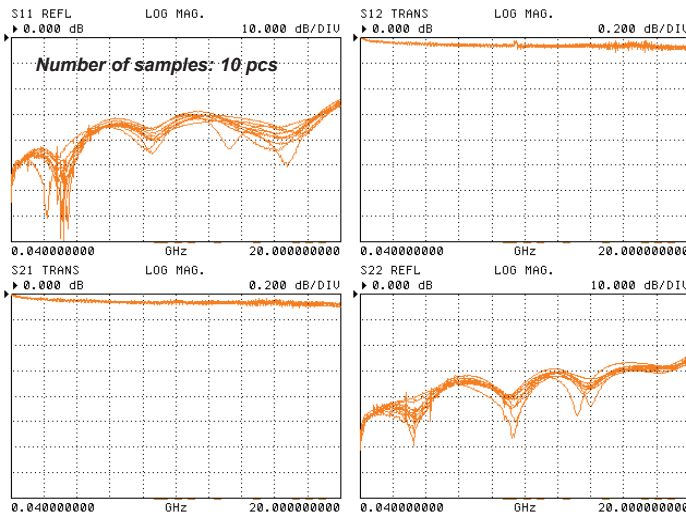

Connect/Disconnect Life ("Non-Insertable Device" Calibration with Time Domain Measurement)

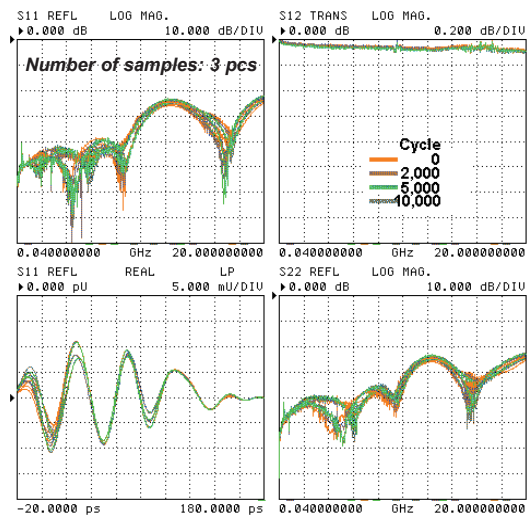

NOTE:

All dimensions are in millimeters.

(*) Moding frequency: 24.7 GHz (theoretically)

(**) Toothed lockwasher is chromate (trivalent) converted zinc-plated steel

(***) Connect/disconnect speed: 10 cycles per minute (conforms to MIL-C-39012/60)

(****) Recommended tightening torque: 300 to 420 N-cm

RoHS Compliant

REACH Compliant

Specifications Subject to Change Without Notice

Copyright(C) 2002-2017 Kawashima Manufacturing Co., Ltd. <All rights reserved.>

Rev. 03 June 2017



Kawashima Manufacturing Co., Ltd.

1-3-5 Higashi-ikuta, Tama-ku,
Kawasaki 214-0031 JAPAN

TEL: +81-44-911-7073
http://www.kmco.biz/

FAX: +81-44-911-9621
e-mail: sales@kmco.co.jp