

Preliminary Datasheet

SHF 115 BP

broadband amplifier



SHF Communication Technologies AG
Wilhelm-von-Siemens-Str. 23D • 12277 Berlin
Telephone ++49 30 / 772 05 10
Fax ++49 30 / 753 10 78
Email: mail@shf.biz
<http://www.shf.biz>

SHF 115 BP

broadband amplifier

Bandwidth: 50 kHz...>17 GHz
Gain: 26 dB \pm 2 dB
Risetime: <33 ps
P_{01dB}: 24 dBm

Preliminary Datasheet


SHF 115 BP

broadband amplifier



Parameter	Symbol	Min.	Typ.	Max.	Units	Conditions
Low Frequency 3 dB point	f_{LOW}			50	kHz	
High Frequency 3 dB point	f_{HIGH}	17			GHz	
Gain		24	26	28	dB	inverting
Gain control voltage		0		-5	V	reduces gain by up to 3 dB
Gain ripple			± 1.5		dB	
Temperature coefficient			-0.06		dB/°C	
Output power at 1dB compression	$P_{01\text{dB}}$	24			dBm	
Input return loss	S_{11}			12	dB	<15 GHz
Output return loss	S_{22}			10	dB	<15 GHz
Maximum input power				4 10	dBm	in operation without power supply
Rise time / Fall time	t_r/t_f			25	ps	20% to 80%
Supply voltage		11		15	V	0.8 A, reverse voltage protected
Power consumption		8.8			W	using 11 V supply voltage
Input connector						SMA female
Output connector						SMA female
Dimensions (L x W x H)					mm	59 x 144 x 40 incl. connectors and heatsink 51 x 40 x 16 without connectors and heatsink

Step response

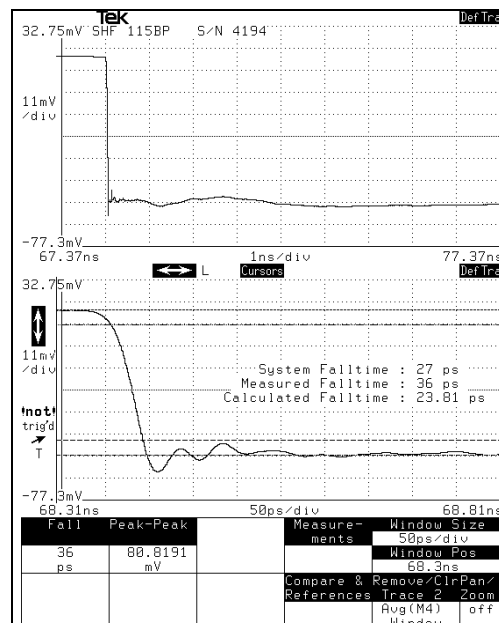

(measured with 26 GHz Sampling head Tektronix SD-26)
Rise time calculated as 10% to 90%







Preliminary Datasheet

SHF 115 BP

broadband amplifier



S-Parameters, group delay and phase response (full gain)

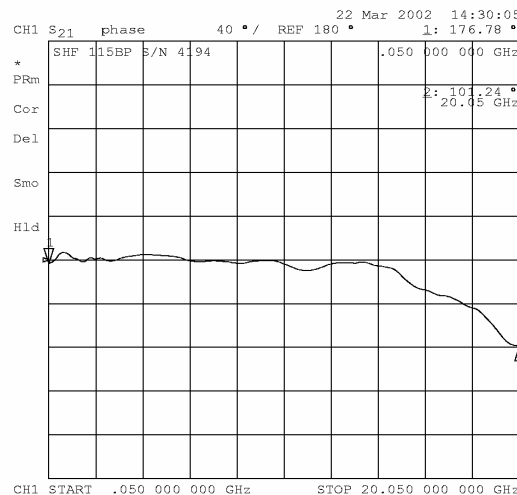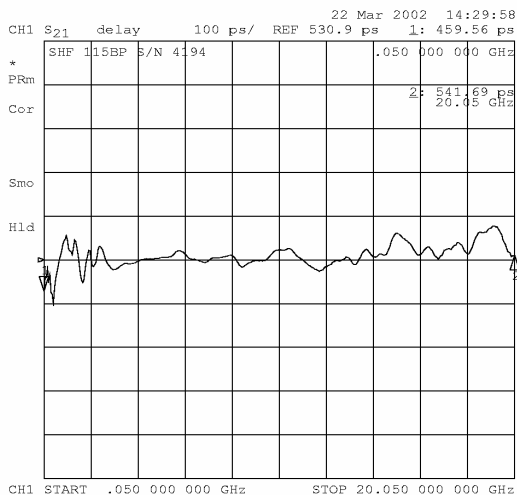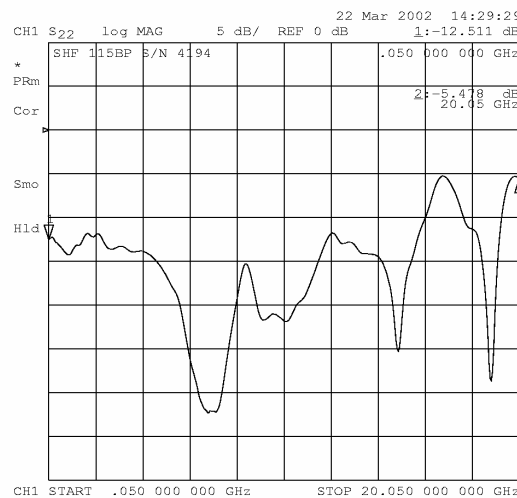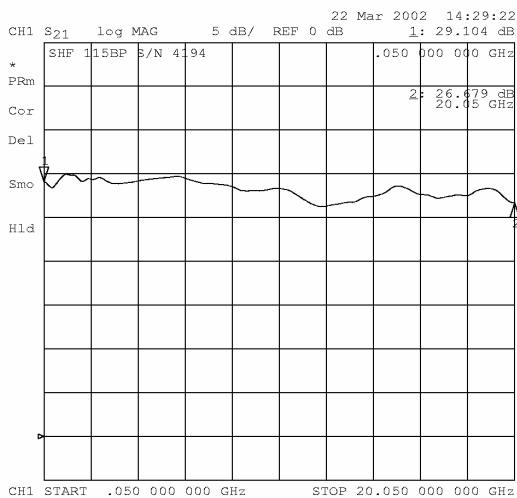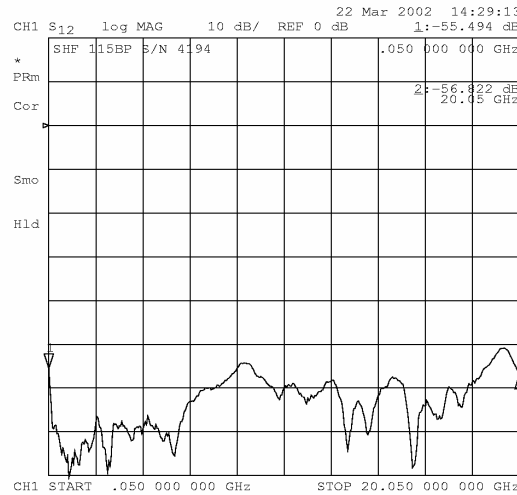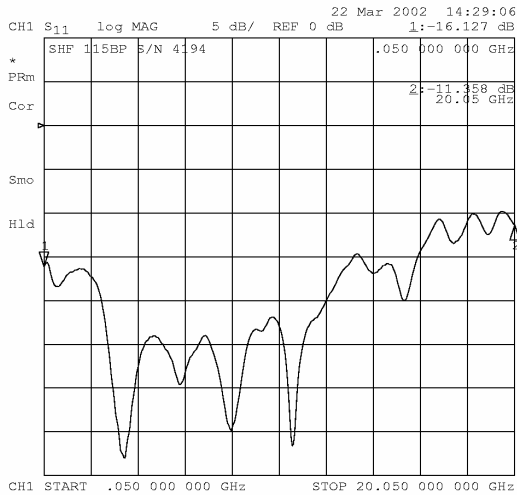

Aperture of group delay measurements: 400 MHz

Preliminary Datasheet

SHF 115 BP


broadband amplifier



Available Options

- 01: DC return on input
- 02: Built-in bias-T on input
- 03: DC return on output
- 04: Built-in bias-T on output
- MP: Matches the phase of two amplifiers

The following options cannot be combined:
 01 and 02
 03 and 04
 02 and 04

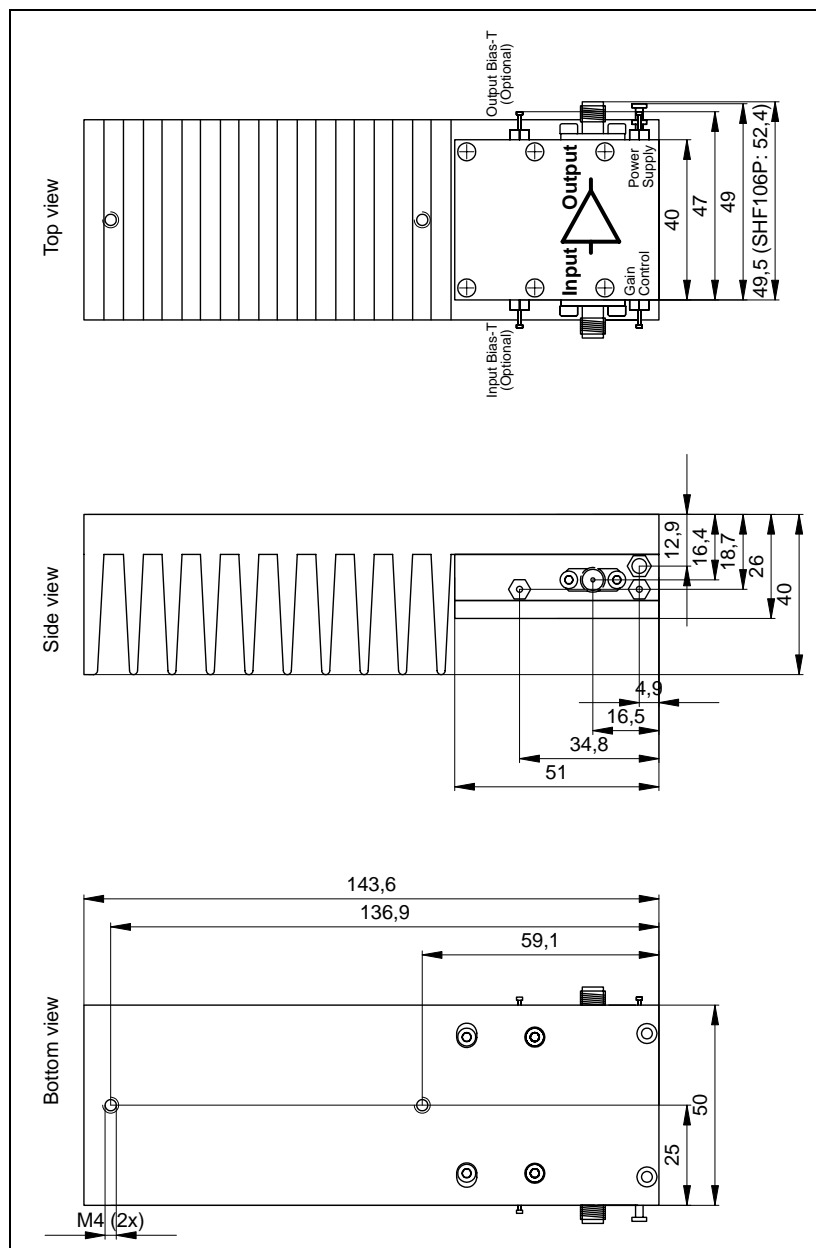

Thermal resistance of heatsink approx 1.5 K/W

For permanent mounting, remove the heatsink from the amplifier. In that case, ensure that adequate cooling of the amplifier is guaranteed.

To remove the heatsink from the amplifier, unscrew the four screws on the heatsink.

The view of the amplifier without heatsink is shown on the following page.


Preliminary Datasheet

SHF 115 BP

broadband amplifier



The SHF 115 BP is a three stage amplifier design using special monolithic microwave integrated circuits (MMICs) inside hermetic carriers to achieve ultra wide bandwidth and low noise performance. The custom made MMIC carrier is optimized for good input return loss between its interior and the 50 Ω outside hybrid technology. The computer optimized broadband circuit is individually tuned for minimum passband ripple. A voltage regulator IC makes the amplifier insensitive to overvoltage and line ripple.

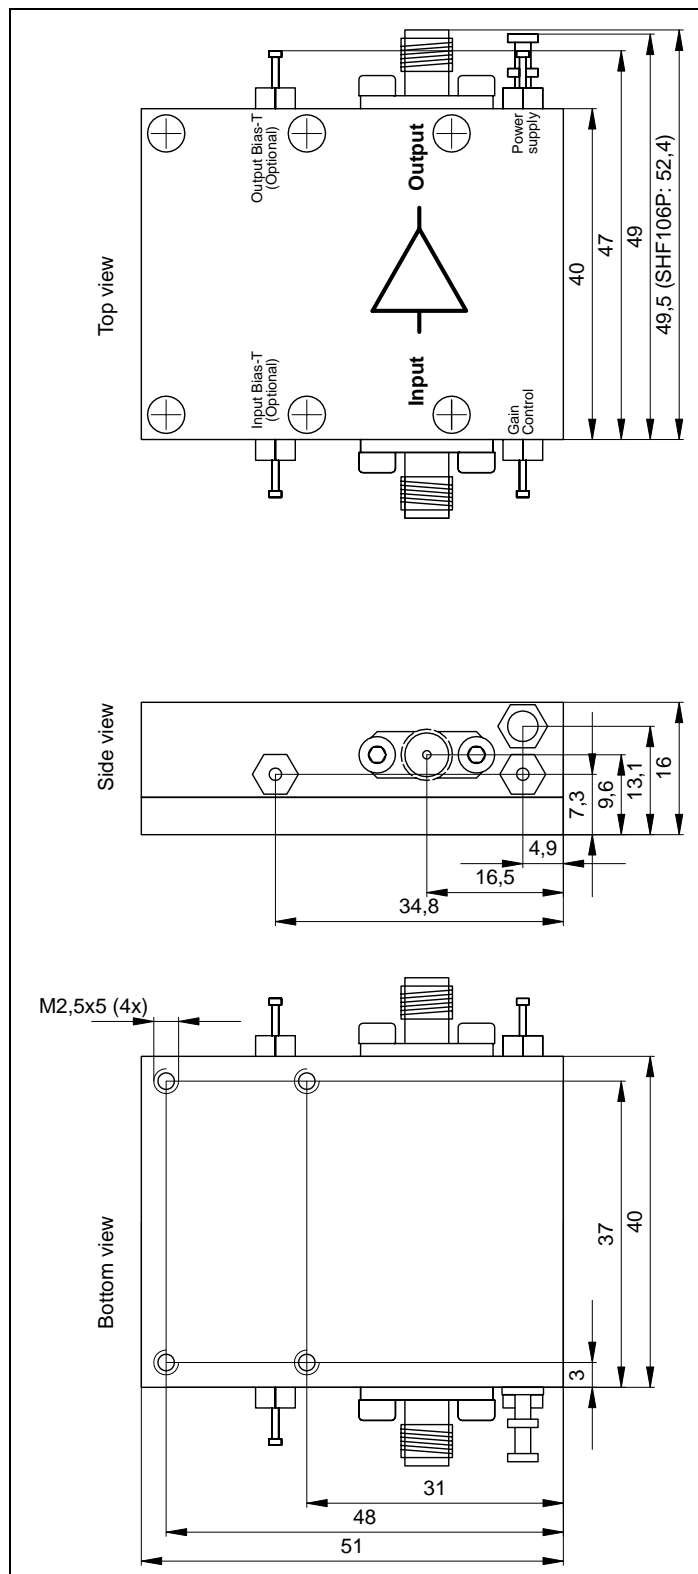



User Instructions

ATTENTION!

ELECTROSTATIC SENSITIVE GaAs FET AMPLIFIER

1. To prevent damage through static charge build up, cables should be always discharged before connecting them to the amplifier!
2. Attach a 50 Ohm output load BEFORE supplying DC power to the amplifier!
3. The supply voltage can be taken from any regular 11 to 15 V, 0.8 A DC power supply and can be connected to the supply feed-through filter via an ON / OFF switch.
4. The minimum supply voltage is 11 V. A higher one increases the power dissipation of the internal voltage stabilizer.
5. Using a 3 dB or 6 dB input attenuator will result in a 6 dB or 12 dB increase of the input return loss. For minimal degradation of amplifier rise time, these attenuators should have a bandwidth specification of greater 50 GHz (V/ 1.85mm or 2.4mm attenuators)!
6. An input signal of about 0.56 V_{pp}, equivalent to -1 dBm, will produce the full swing output of 10 V_{pp}.
7. Higher input voltages will drive the amplifier's output stage into saturation, leading to waveform peak clipping.
8. Saturated output voltages can only be used within the operating frequency range without damage while the amplifier is connected to a 50 Ohm precision load with a VSWR of less than 1.2 or better than 20 dB return loss up to the highest operating frequency (i.e, that limited by the K- or V-attenuator).
9. While using a reflective load, the output voltage has to be reduced to a safe operating level below 10 V_{pp} according to the magnitudes of the reflections.
ATTENTION: At frequencies up to 20 GHz, a capacitive load can be transformed to an inductive one through transmission lines! With an output stage driven into saturation this will lead to the immediate destruction of the amplifier (within a few ps)!
10. The input voltage should never be greater than 1 V_{pp}, equivalent to 4 dBm input power.
11. Hint: Pulse shape tuning of the amplifier has been performed after warm up at about 40 °C case temperature. Considerably more over- and undershoot will be present at low temperature!