




## SHF Communication Technologies AG

Wilhelm-von-Siemens-Str. 23D • 12277 Berlin • Germany

Phone +49 30 772 051-0 • Fax +49 30 753 10 78

E-Mail: [sales@shf-communication.com](mailto:sales@shf-communication.com) • Web: [www.shf-communication.com](http://www.shf-communication.com)

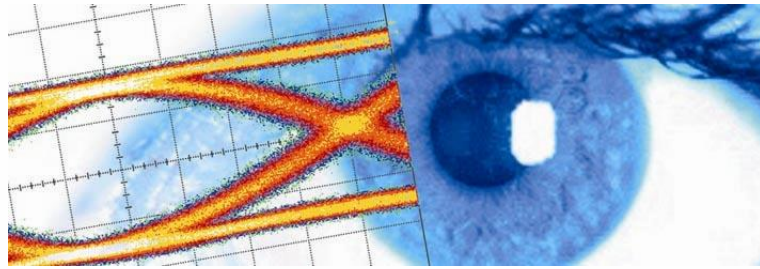

# Datasheet SHF DX45R Diplexer





## Description

The SHF DX45R diplexer is the RoHS compliant successor of the SHF DX45. A diplexer is essentially a bias tee with a certain bandwidth in the low frequency path to combine or separate high frequency and low frequency signals into or from a single line.

Any existing DC content is blocked from its HF input. Based on SHF's air line construction, it offers resonance-free transmission up to 45 GHz. In addition to the low insertion loss, all products have an extremely low group delay ripple.

## Applications

- Optical Communications
- High-Speed Pulse Experiments
- Satellite Communications
- Research and Development
- Antenna Measurements
- Data Transmission

## Configurations

- A - HF port: 2.92 mm male, HF+LF port: 2.92 mm female
- B - HF port: 2.92 mm female, HF+LF port: 2.92 mm male
- C - HF port: 2.92 mm male, HF+LF port: 2.92 mm male
- D - HF port: 2.92 mm female, HF+LF port: 2.92 mm female

One of above configurations has to be chosen. For more information, please be referred to the mechanical drawing on the last page of this data sheet. For Option X01 and X02 is configuration B not available. The low frequency port is always SMA female.

## Options

- HVC50/1000 - High Voltage & Current (maximum voltage extended to  $\pm 50$  V and maximum LF current extended to  $\pm 1$  A)
- HVC100/2000 - High Voltage & Current (maximum voltage extended to  $\pm 100$  V and maximum LF current extended to  $\pm 2$  A)
- X01 - High Voltage & Current (maximum voltage extended to  $\pm 50$  V and maximum LF current extended to  $\pm 1$  A); Crossover Frequency at  $\sim 1$  GHz
- X02 - High Voltage & Current (maximum voltage extended to  $\pm 50$  V and maximum LF current extended to  $\pm 1$  A); Crossover Frequency at  $\sim 2$  GHz



## Specifications - SHF DX45R

| Parameter                                                                                                   | Unit       | Symbol        | Min | Typ | Max       | Conditions                                                                                        |
|-------------------------------------------------------------------------------------------------------------|------------|---------------|-----|-----|-----------|---------------------------------------------------------------------------------------------------|
| <b>Absolute Maximum Ratings for SHF DX45R without Option</b>                                                |            |               |     |     |           |                                                                                                   |
| Maximum HF Input                                                                                            | dBm        | $P_{in\ max}$ |     |     | 30        | average power of a continuous <sup>1</sup> signal, 50 $\Omega$ load and $f \geq 2 \times f_{Low}$ |
| Maximum Voltage                                                                                             | V          |               |     |     | $\pm 20$  | voltage across the coupling capacitor between HF and HF+LF port and between ports and GND         |
| Maximum LF Current                                                                                          | mA         |               |     |     | $\pm 400$ |                                                                                                   |
| Case Temperature                                                                                            | $T_{case}$ | $^{\circ}C$   | 10  | 25  | 50        |                                                                                                   |
| <b>Electrical Characteristics SHF DX45R-A without Option (At 25<math>^{\circ}C</math> case temperature)</b> |            |               |     |     |           |                                                                                                   |
| High Frequency 3 dB Point HF-Path                                                                           | GHz        | $f_{HIGH}$    | 45  |     |           |                                                                                                   |
| Low Frequency 3 dB Point HF-Path                                                                            | MHz        | $f_{LOW}$     |     |     | 90        |                                                                                                   |
| High Frequency 3 dB Point LF-Path                                                                           | MHz        | $f_{HIGH}$    | 25  |     |           |                                                                                                   |
| Low Frequency 3 dB Point LF-Path                                                                            | Hz         | $f_{LOW}$     |     |     | 0         | DC <sup>2</sup>                                                                                   |
| Insertion loss                                                                                              | dB         | $S_{21}$      |     |     | 1.5       | >0.5 GHz <40 GHz                                                                                  |
| Reflection                                                                                                  | dB         | $S_{11}$      |     |     | -10<br>-8 | >40 MHz <35 GHz<br><45 GHz HF+LF Port                                                             |
|                                                                                                             | dB         | $S_{22}$      |     |     | -10<br>-8 | >1 GHz <35 GHz<br><45 GHz HF Port                                                                 |
|                                                                                                             | dB         | $S_{33}$      |     |     | -10       | <100 MHz LF Port                                                                                  |
| Group Delay Ripple                                                                                          | ps         |               |     |     | $\pm 50$  | 1 GHz ... 40 GHz, 160 MHz Aperture                                                                |
| DC Resistance                                                                                               | $\Omega$   |               |     | 1   |           | LF to HF+LF Port                                                                                  |

<sup>1</sup> 30 dBm (1 W) equals 20 V peak to peak for continuous sinusoidal signals. A pulsed excitation with an average of 1 W and thus having significantly higher peaks may be possible. The maximum RF input power does not change in case a signal is applied to the LF port.

<sup>2</sup> For resonance-free transmission the LF port requires a 50  $\Omega$  termination.




| Parameter                         | Unit | Symbol | Min | Typ | Max | Conditions        |
|-----------------------------------|------|--------|-----|-----|-----|-------------------|
| <b>Mechanical Characteristics</b> |      |        |     |     |     |                   |
| Connector<br>HF ; HF+LF<br>LF     | Ω    |        |     | 50  |     | 2.92mm<br>SMA     |
| Dimensions                        | mm   |        |     |     |     | please see page 8 |
| Weight                            | g    |        |     | 22  |     |                   |

In case an option is chosen the following variations to above specifications apply:


| Parameter                                 | Unit | No option | HVC 50/1000 | HVC 100/2000 | X01  | X02  |
|-------------------------------------------|------|-----------|-------------|--------------|------|------|
| Maximum Voltage                           | V    | ±20       | ±50         | ±100         | ±50  | ±50  |
| Maximum LF Current                        | A    | ±0.4      | ±1          | ±2           | ±1   | ±1   |
| Min. High Frequency 3 dB Point of HF-Path | GHz  | 45        | 45          | 45           | 32   | 40   |
| Max. Low Frequency 3 dB Point of HF-Path  | MHz  | 90        | 100         | 100          | 1200 | 3000 |
| Min. High Frequency 3 dB Point of LF-Path | MHz  | 25        | 25          | 25           | 600  | 1000 |
| Low Frequency 3 dB Point of LF-Path       | Hz   | 0         | 0           | 0            | 0    | 0    |
| Typical LF Resistance                     | Ω    | 1         | 1           | 1            | 1    | 1    |



# Typical S-Parameters for a DX45R-A without Option


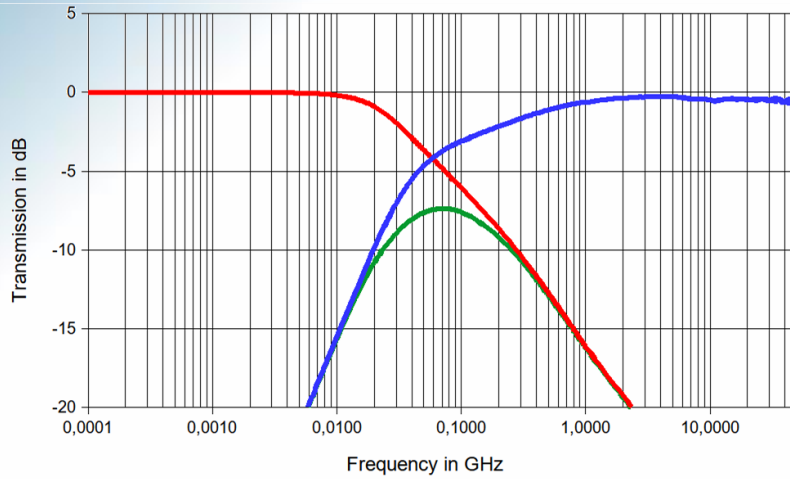


**S21:** blue ; **S13:** red ; **S23:** green

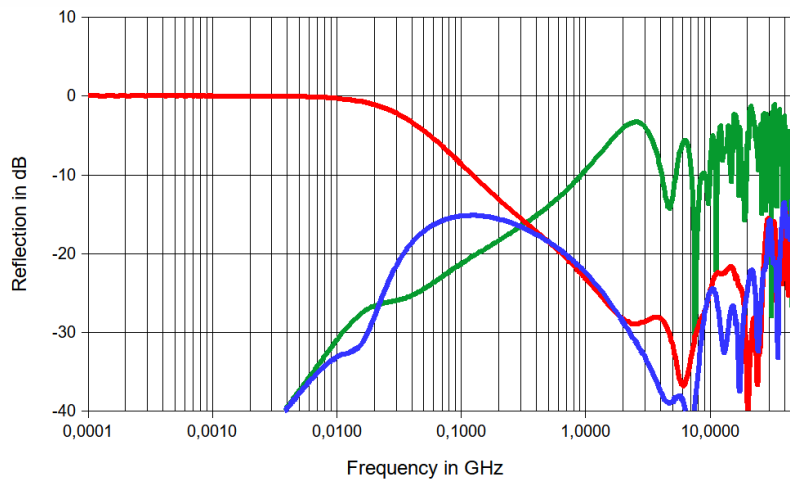

**S11:** blue ; **S22:** red ; **S33:** green

Please refer to the mechanical drawing for the pin assignment.

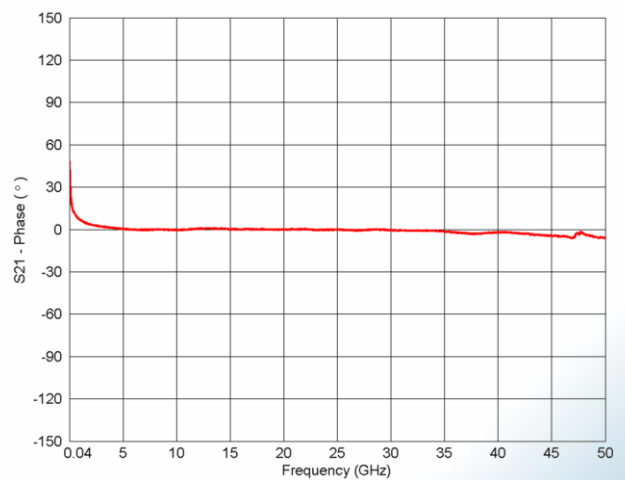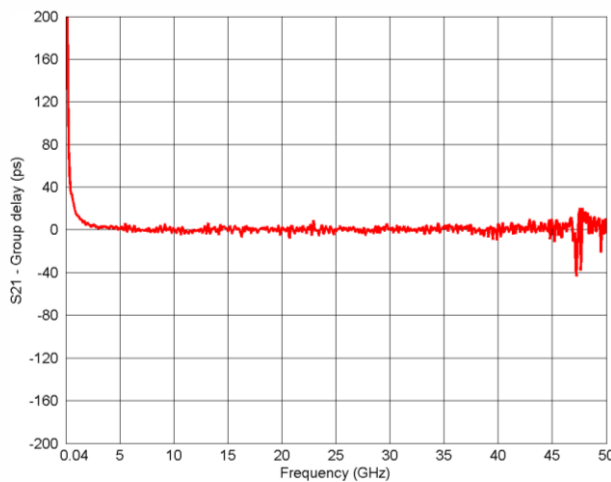


Aperture of group delay measurement: 160 MHz


S21 phase measurement has been compensated by propagation delay to visualize phase linearity.



# Typical S-Parameters for a DX45R-A with Option X01


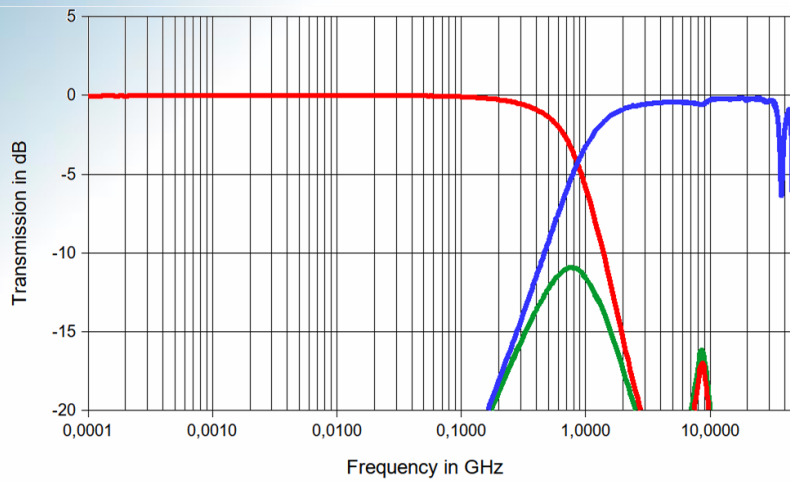


**S21:** blue ; **S13:** red ; **S23:** green

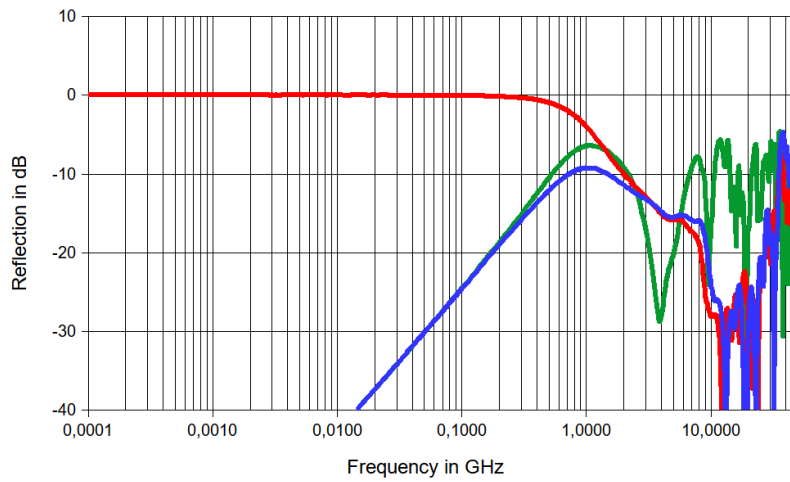

**S11:** blue ; **S22:** red ; **S33:** green

Please refer to the mechanical drawing for the pin assignment.

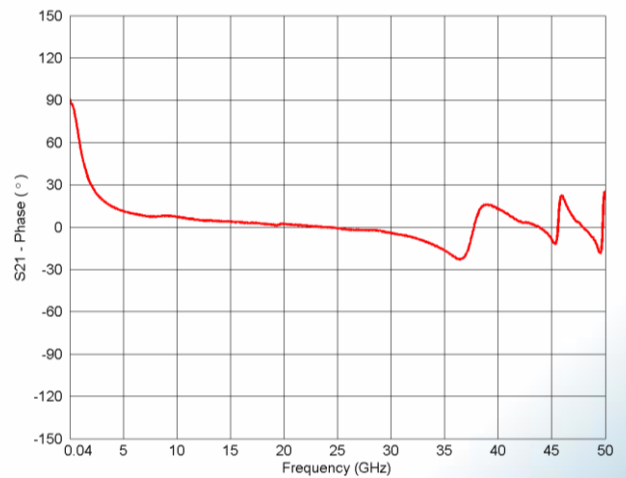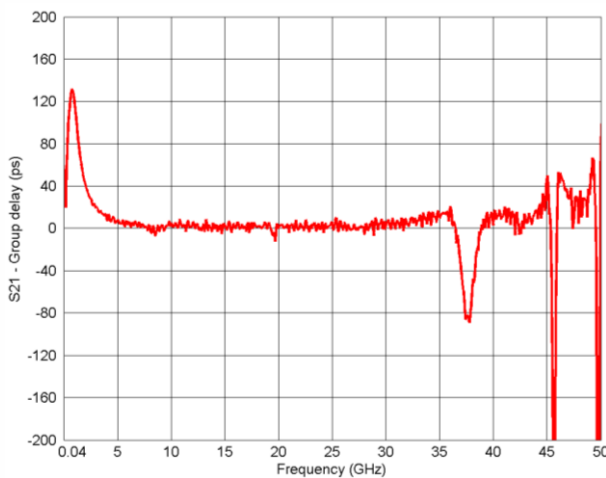


Aperture of group delay measurement: 160 MHz


S21 phase measurement has been compensated by propagation delay to visualize phase linearity.



## Typical S-Parameters for a DX45R-A with Option X02


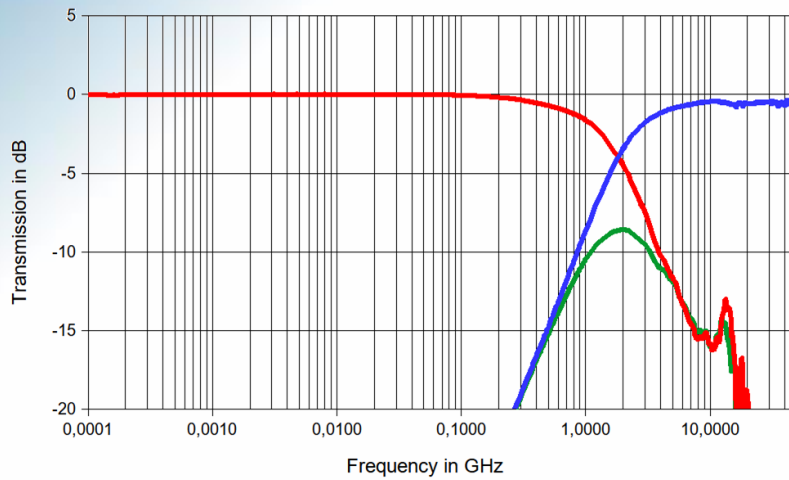


**S21:** blue ; **S13:** red ; **S23:** green

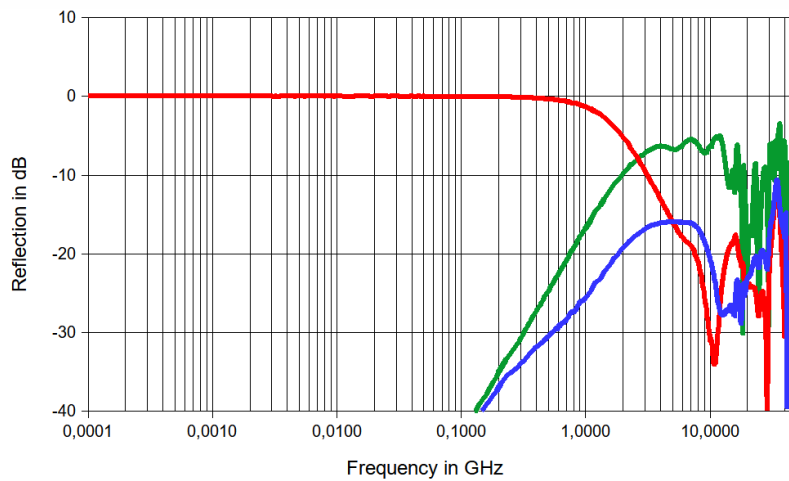

**S11:** blue ; **S22:** red ; **S33:** green

Please refer to the mechanical drawing for the pin assignment.












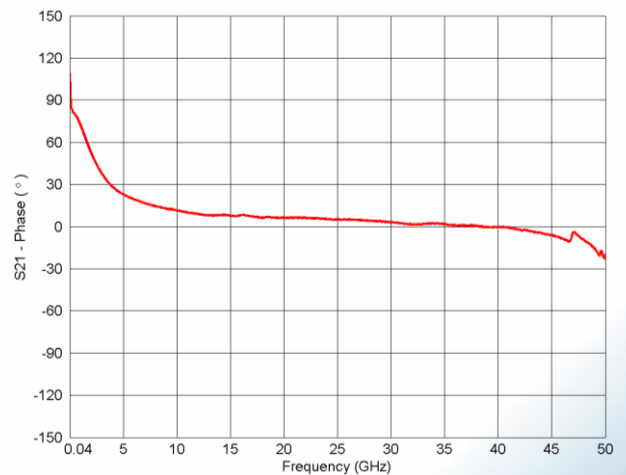
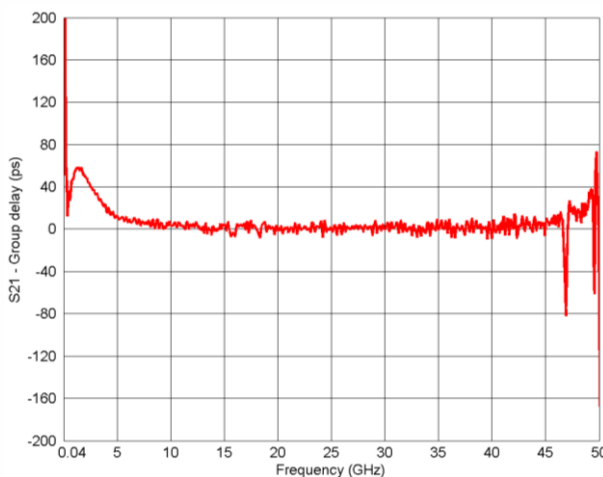


Aperture of group delay measurement: 160 MHz

S21 phase measurement has been compensated by propagation delay to visualize phase linearity.



# Mechanical Drawing

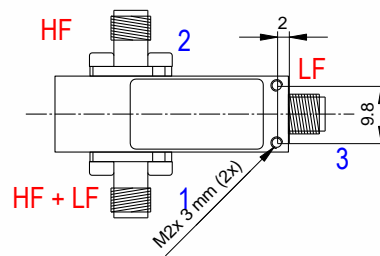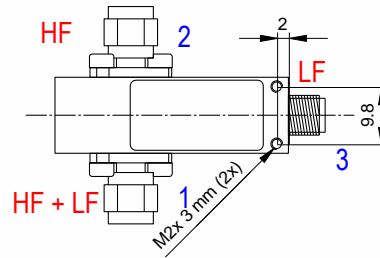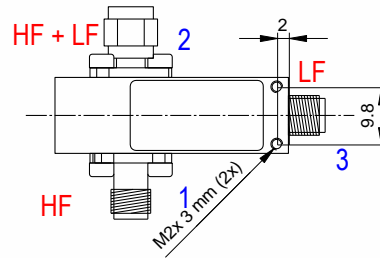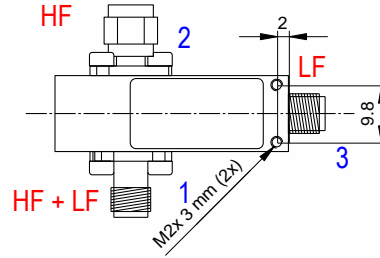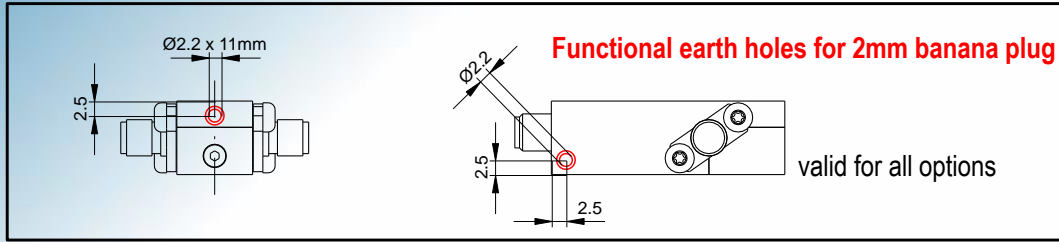

All dimensions in mm