

2.92mm/1.85mm

DC - 40GHz, Coaxial Adapters, Between-Series

DESCRIPTION

The coaxial adapters between 2.92mm and 1.85mm that small size, low SWR and low loss, are designed for broadband measurement, instrument and system use.

SPECIFICATIONS:

Electrical:	
Frequency Range	DC - 40 GHz
SWR	<1.3
Insertion Loss	<0.35 dB
Electrical Length	17.5 mm(Nominal)
Temperature Range	-55 to +125 deg.C







Mechanical:

- Body and Outer Conductors:
 - Passivated Stainless steel
- Inner Conductors:
 - Gold Plated Beryllium Copper and Brass
- Coupling Torque 90 N-cm(Nominal)
- Connect/Disconnect Life >1,000 Cycles





Production Status
Two weeks Lead-Time will be available for shipping.

Typical Performance

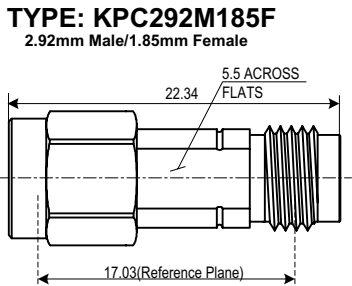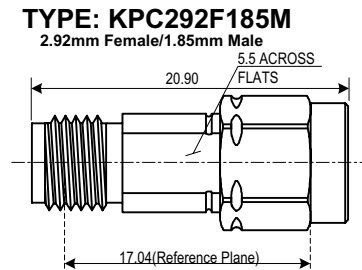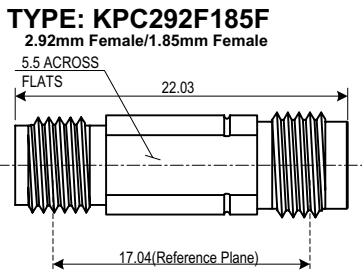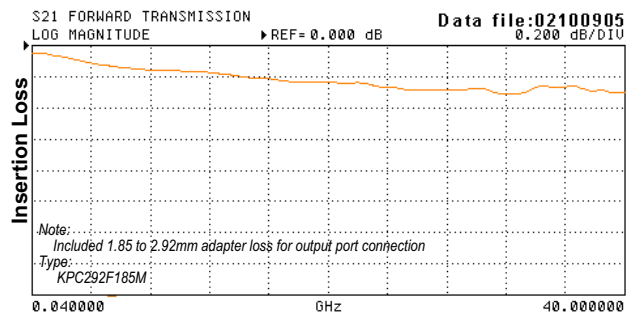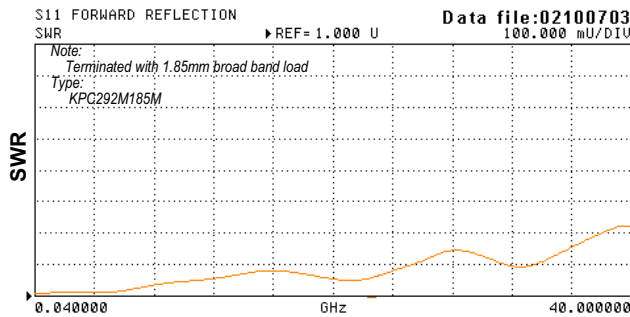

Interface Mating Dimensions

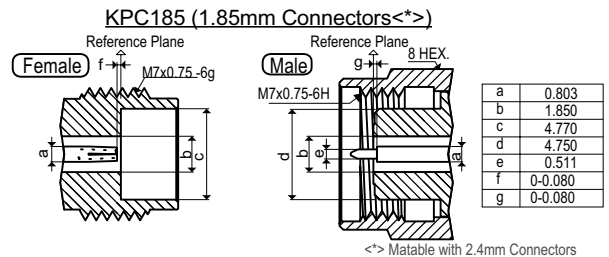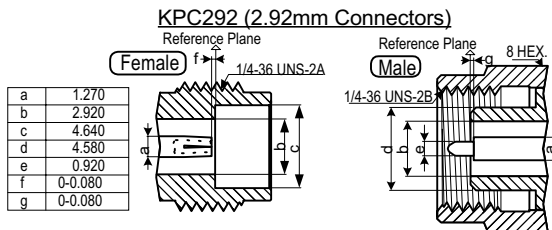

Note: All dimensions are in Millimeters.

Specifications Subject to Change Without Notice.

Copyright(C) 2002 KAWASHIMA Mfg. Co., Ltd. All rights reserved.