




SHF Communication Technologies AG

Wilhelm-von-Siemens-Str. 23 • Aufgang D • 12277 Berlin – Marienfelde • Germany

Phone ++49 30 / 772 05 10 • Fax ++49 30 / 753 10 78


E-Mail: sales@shf.biz • Web: <http://www.shf.biz>

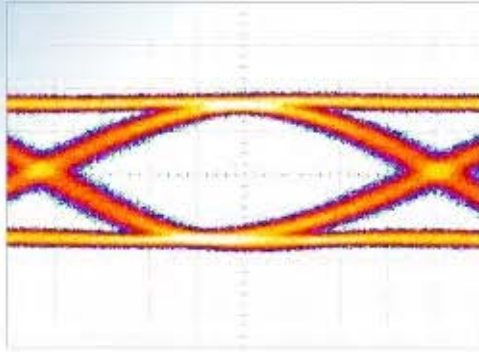

Datasheet

SHF DF65

Broadband DC Feeder

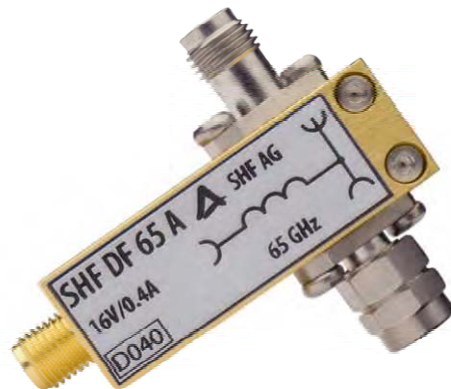

Resonance free transmission performance to over 65 GHz
Innovative construction – Patent pending



SHF Communication Technologies AG
the bandwidth company







Specifications – SHF DF65



Parameter	Symbol	Unit	Min	Typ	Max	Conditions
High frequency 3 dB point	f_{HIGH}	GHz	65			
Insertion loss	S_{21}	dB		1	1.5	<60 GHz
Input return loss	S_{11}	dB			-17 -15 -10	>500 kHz <15 GHz <30 GHz <65 GHz
Rise time/Fall time	t_r/t_f	ps			5	10...90%
Maximum current	I_{max}	mA			400	
Maximum voltage *	V_{max}				16	
Input connector						V (1.85 mm)
Output connector						V (1.85 mm)
Dimensions		mm				40x13x12.6

* 100V, 200V versions available on request. Note that this affects the S_{11} specification at low frequencies

Insertion loss and input return loss

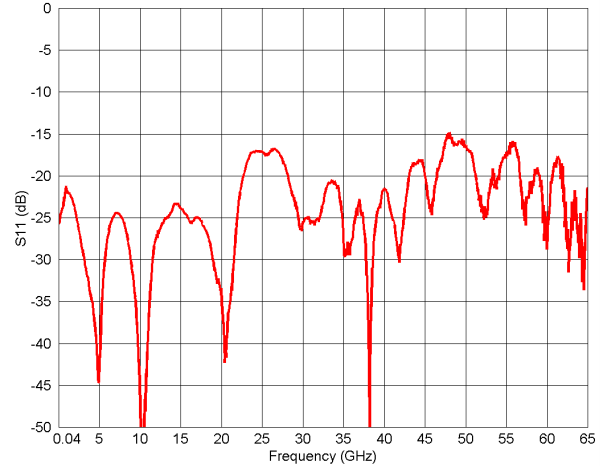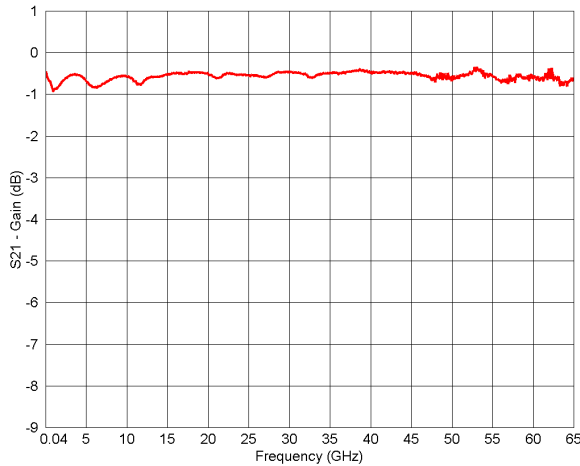

Group delay and phase response

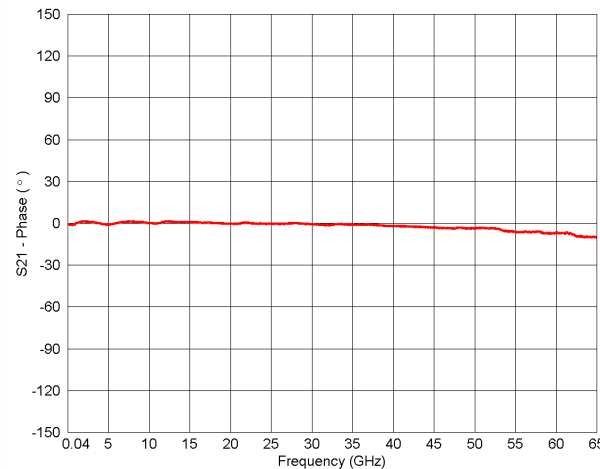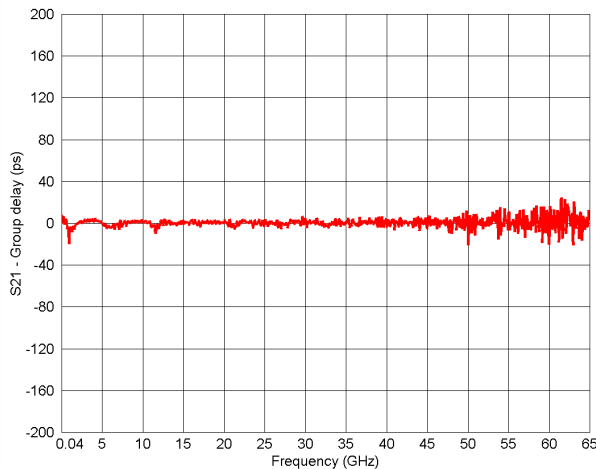

Aperture of group delay measurement: 100MHz



Outline diagram

Applications

- Optical Communications
- Research and Development
- High-Speed Pulse Experiments
- Data Transmission

The following combinations of connectors are available.

Please specify with your order.

