




SHF Communication Technologies AG,

Amalienstrasse 14 • 12247 Berlin – Lankwitz, Phone ++49 30 / 772 05 10, Fax ++49 30 / 753 10 78,

E-Mail: mail@shf.biz, Web: <http://www.shf.biz>

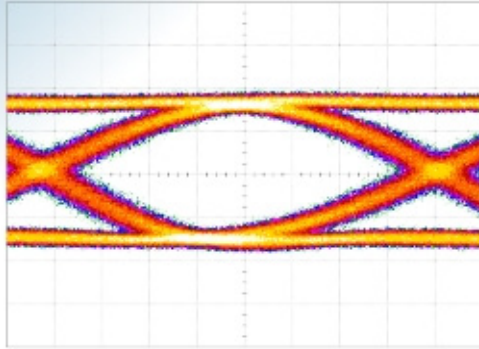

Datasheet

SHF 1030

5:1 Signal Selector





Description

The SHF 1030 is a five way switch which can select from five inputs and produce a single output. Used in combination with the SHF 5002 A 1:4 demultiplexer, a 50 Gbps signal can be demultiplexed and the four channels fed into the SHF 1030. One of these channels can be selected and analyzed with a 12.5 Gbps error analyzer. The other channels can then be successively tested to ensure that they are also error free. This system thus provides a cheaper alternative to a 50 Gbps error analyzer by testing the subchannels of a data stream in series, rather than in parallel.


An extra feature of the SHF 1030 is that the user can control up to two external step attenuators. As the requirements of attenuators vary according to manufacturer (different supply voltages and power requirements), the properties of these outputs are set according to the customer's wishes.

To raise the output signal level, an amplifier can be optionally fitted which will produce an output level of up to $2.5 V_{pp}$, depending on the input signal level.

Features

- Broadband operation up to 18 Gbps
- Control for two step attenuators
- SMA female input and output connectors
- High efficiency switching power supply
- All functions microprocessor controlled
- External GPIB control

Functional Block Diagram

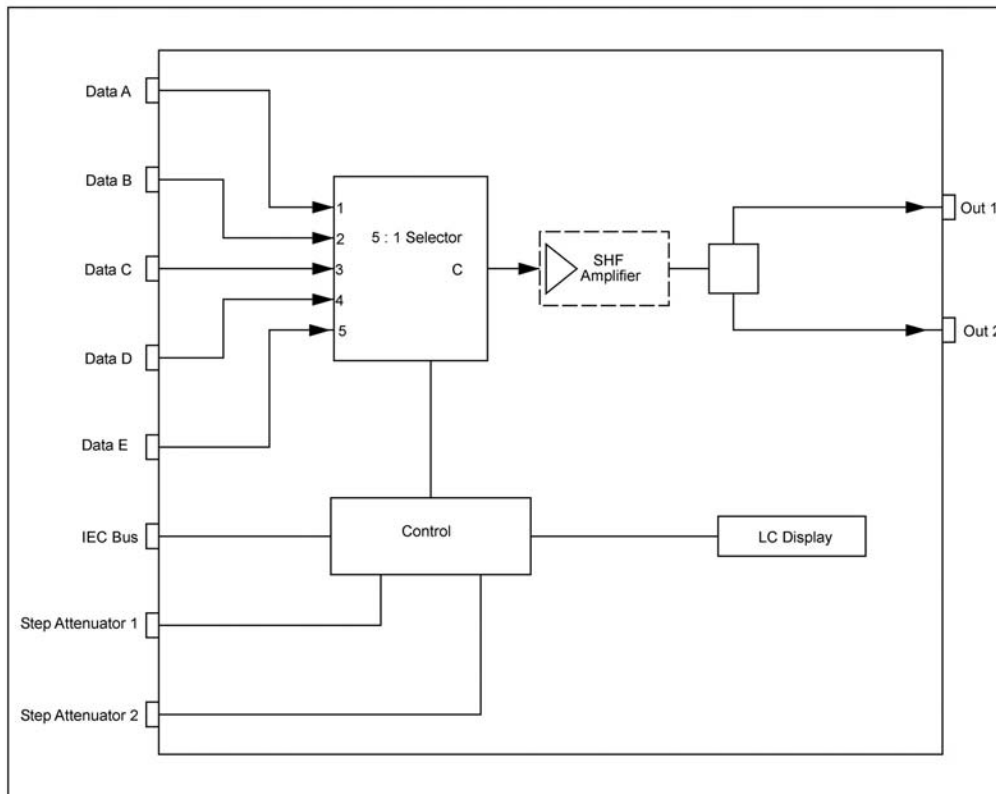




Specifications


Parameter	Unit	Min.	Typ.	Max.	Conditions
Electrical parameters					
Max. input power without optional input amplifier with optional input amplifier	dBm			30 10	
Impedance			50		
Frequency range	GHz	0		18	
Input return loss	dB			15 10	<15 GHz <18 GHz
Output return loss	dB			15 10	<15 GHz <18 GHz
Insertion loss	dB		6		
Output level	V			2.5	with internal amplifier
Attenuator outputs					Set according to requirements of external attenuator
General specifications					
Power supply	V	90 180	110 230	135 270	47...63 Hz
Input connectors					SMA
Output connectors					SMA
Power consumption	W			30	
Operating temperature	°C	10		35	
Storage temperature	°C	-20		70	
Weight	kg		9.5		
Dimensions (WxHxD)	mm				472x110x365

Output waveforms


10 Gbps eye diagrams

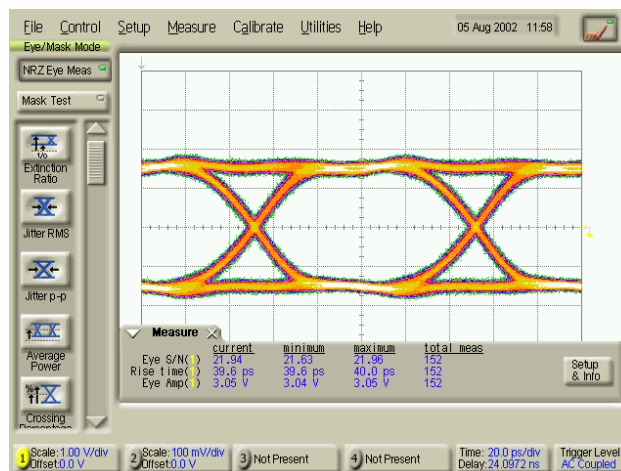

Input signal

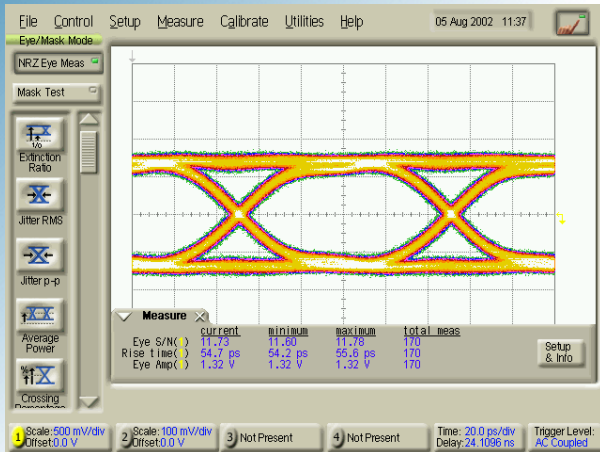


Output 1

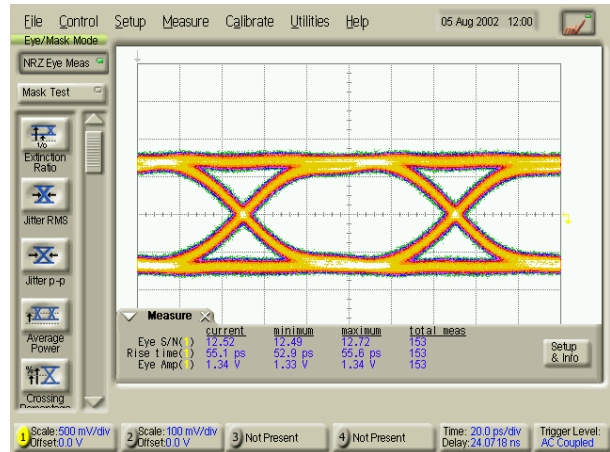


Output 2


12.5 Gbps eye diagrams

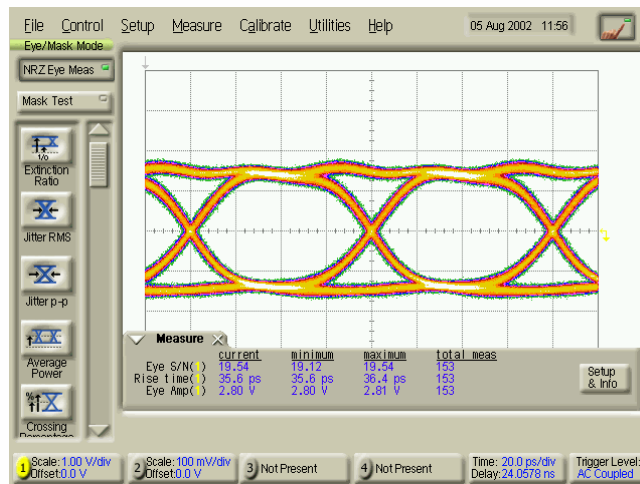

Input signal

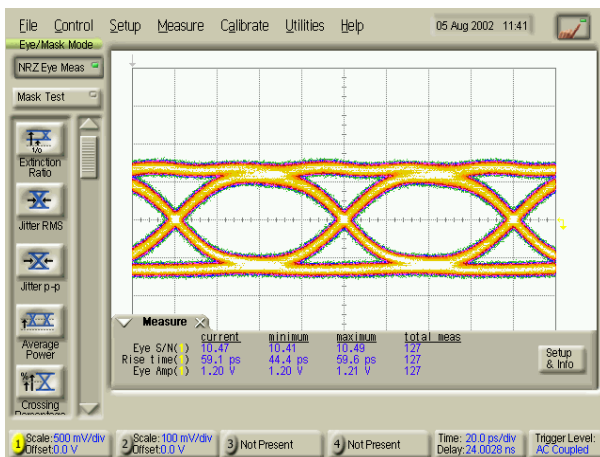

Output 1

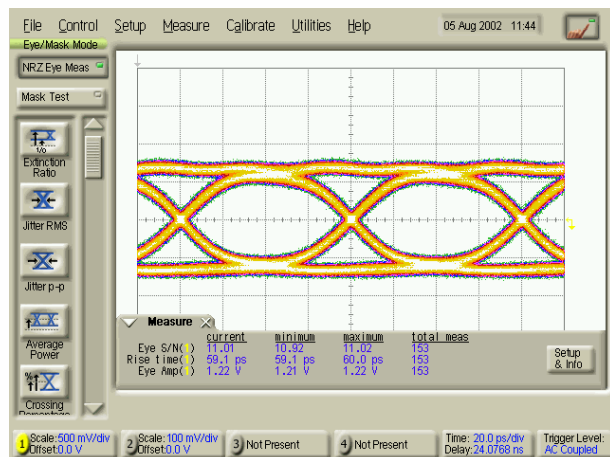

Output 2