




SHF Communication Technologies AG

Wilhelm-von-Siemens-Str. 23D • 12277 Berlin • Germany

Phone ++49 30 / 772 05 10 • Fax ++49 30 / 753 10 78

E-Mail: sales@shf.de • Web: <http://www.shf.de>

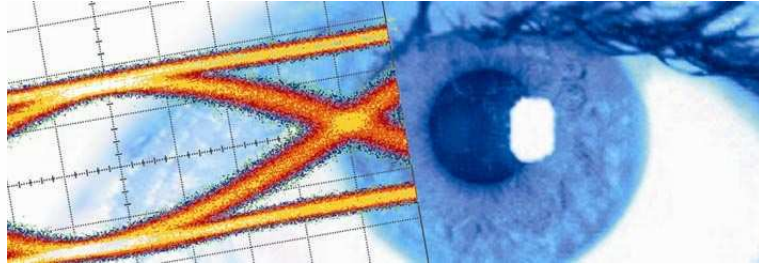

Datasheet

SHF 2000DEL WOC

Mechanical Delay Line





Description

The SHF 2000DEL WOC is a manually operated mechanical delay line with broadband operation. For all application where it is required to delay electrical signals the SHF 2000DEL WOC is a perfect solution. The linear operation of the control handle enables an easy adaptation to motorized controls. To guarantee a long term stable performance over many mechanical cycles, the SHF 2000DEL WOC features a very robust trombone design.

Features

- Broadband operation up to 20 GHz
- Very low insertion loss
- Robust trombone design
- Ideally suited for adaptation to motorized control


Specifications

Parameter	Unit	Min.	Typ.	Max.	Conditions
Input / output impedance; connector Type	Ω		50		3.5 mm female (SMA and 2.92mm compatible)
Low cut-off frequency	GHz	DC			
High cut-off frequency	GHz	18	20		
Maximum achievable delay variation ¹	ps	160			
Insertion loss	dB		1.2		@ 18 GHz
Input/output return loss	dB		13 11		< 10 GHz < 18 GHz,
Weight	g		80		
Dimensions (W x H x D)	mm				89 x 32 x 10.3 (without connectors and control handle)
Operating temperature	°C	10		35	
Storage temperature	°C	-20		70	

¹ Propagation delay variance between the status with fully extracted and a fully retracted slider (continuously variable by moving the slider)



Mechanical Outline

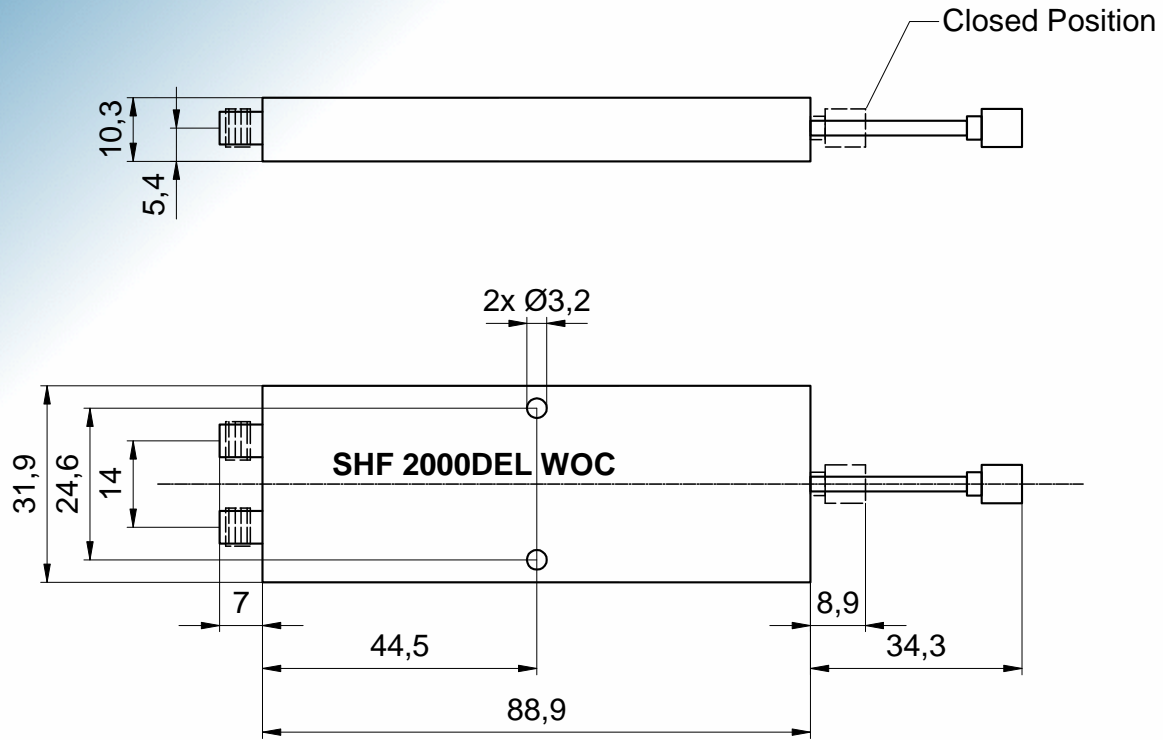

Note: all dimensions in mm